


道路灯具光度数据

实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm		
灯具名称: Sunmao	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

光源数据		光度数据		光效: 151.67 lm/W	
型号		峰值光强(cd/klm)	377.6	η路边向上(%)	0.4
标称功率(W)	120	灯具效率(%)	100.0	η路边向下(%)	49.9
额定电源电压(V)	220	总光通量(lm/klm)	1000.0	η屋边向上(%)	0.3
额定光通量(lm)	18767.5	峰值光强位置(C,γ)	150°,58.0°	η屋边向下(%)	49.3
灯具内光源数(只)	1	上射光通比(%)	0.8	76°闪亮面积(m2)	
实测电源电压(V)	220	下射光通比(%)	99.2	不舒适眩光 SLI	

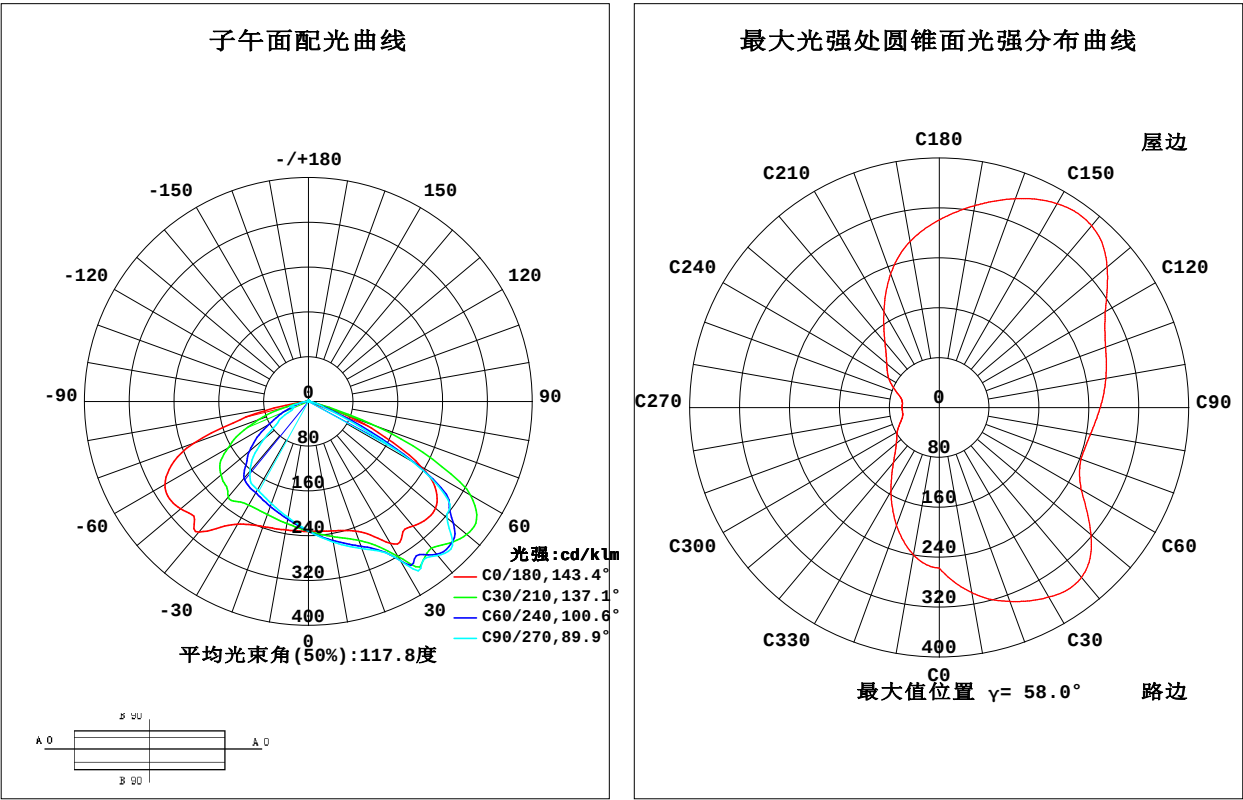


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

道路灯具等光强图(圆形网图)



实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm		
灯具名称: Sunmao	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

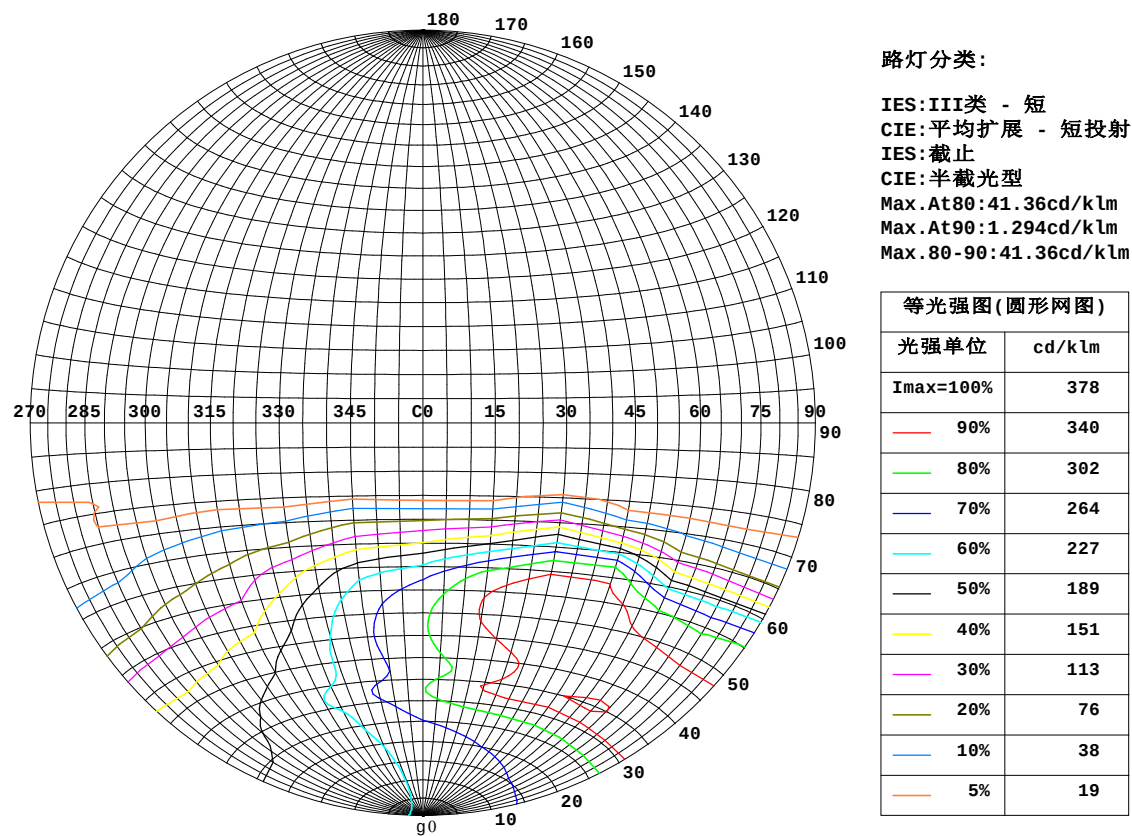

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

灯具利用系数曲线和水平面等照度曲线

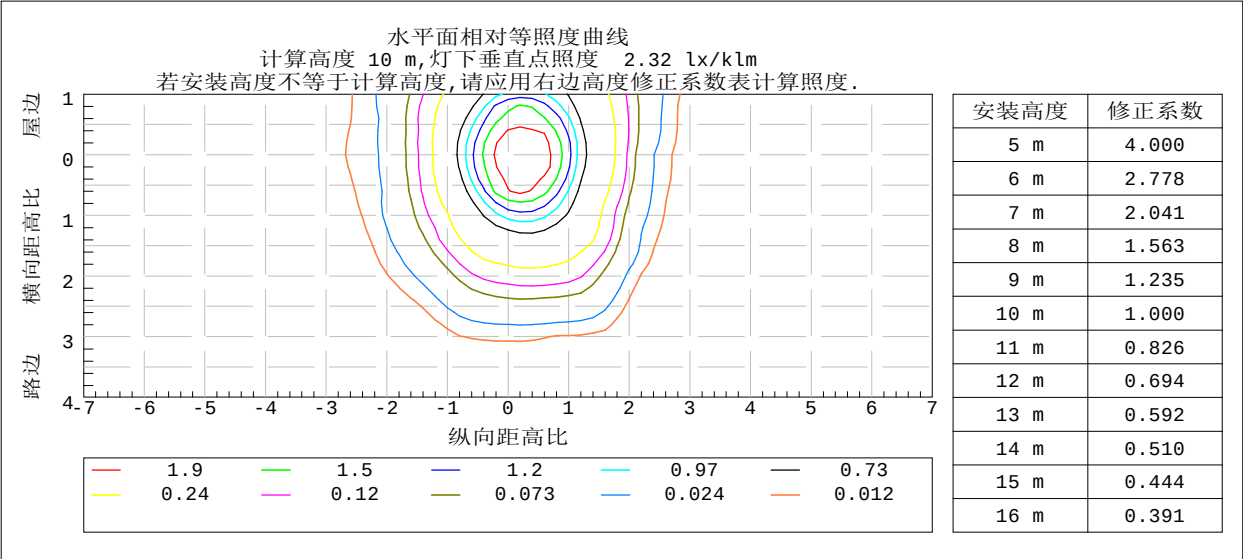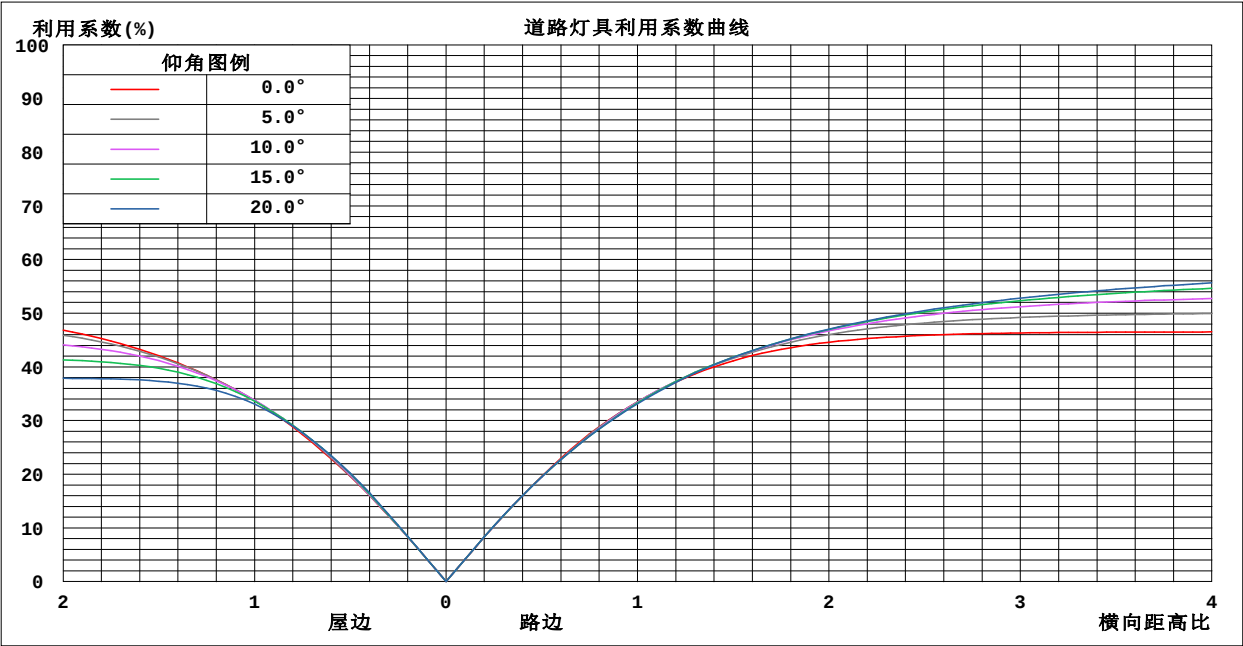

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

灯具环带光通量

实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm		
灯具名称: Sunmao	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:


g	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	234.8	248.4	254.7	246.9	233.1	216.8	210.5	216.5	0- 10	22.12	22.12	2.21, 2.21
20	246.5	270.3	279.6	265.6	237.8	205.9	194.3	206.9	10- 20	66.67	88.78	8.88, 8.88
30	292.6	321.3	328.0	292.6	253.3	197.4	182.5	206.1	20- 30	114.1	202.9	20.3, 20.3
40	290.8	359.9	359.3	342.0	304.9	192.7	162.6	188.4	30- 40	170.2	373.1	37.3, 37.3
50	296.2	366.5	323.1	361.3	298.2	161.2	102.8	145.2	40- 50	208.7	581.8	58.2, 58.2
60	230.5	333.5	213.4	362.1	296.0	111.0	49.12	89.88	50- 60	214.0	795.7	79.6, 79.6
70	70.12	62.22	27.39	228.2	216.6	57.57	27.80	33.65	60- 70	147.2	942.9	94.3, 94.3
80	2.511	2.292	3.688	14.45	41.36	13.74	12.32	4.580	70- 80	45.71	988.6	98.9, 98.9
90	0.5531	0.2484	0.2634	0.2886	1.294	0.9736	0.4272	0.7702	80- 90	3.879	992.5	99.2, 99.2
100	0.8982	0.3426	0.2347	0.2931	0.7264	1.002	0.8634	1.289	90-100	0.6287	993.1	99.3, 99.3
110	1.208	0.5272	0.3164	0.4386	1.097	1.467	1.431	1.664	100-110	0.9191	994.0	99.4, 99.4
120	1.439	0.7380	0.4944	0.6388	1.376	1.760	1.872	1.949	110-120	1.150	995.2	99.5, 99.5
130	1.580	0.9456	0.6932	0.8404	1.559	1.955	2.177	2.120	120-130	1.248	996.4	99.6, 99.6
140	1.645	1.135	0.8853	0.9983	1.645	1.988	2.189	2.071	130-140	1.179	997.6	99.8, 99.8
150	1.709	1.291	1.064	1.140	1.681	1.977	2.114	1.968	140-150	0.9898	998.6	99.9, 99.9
160	1.749	1.433	1.259	1.313	1.724	1.896	2.024	1.921	150-160	0.7514	999.4	99.9, 99.9
170	1.780	1.588	1.482	1.519	1.771	1.829	1.855	1.833	160-170	0.4754	999.8	100, 100
180	1.801	1.720	1.666	1.681	1.803	1.720	1.665	1.682	170-180	0.1629	1000.0	100, 100
单位:°	光强单位:cd/klm									单位:lm/klm		

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.400
环境湿度:65.0%
测试距离:6.160米 [K=1.0000]
备注:

灯 具 等 光 强 曲 线


实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm		
灯具名称: Sunmao	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

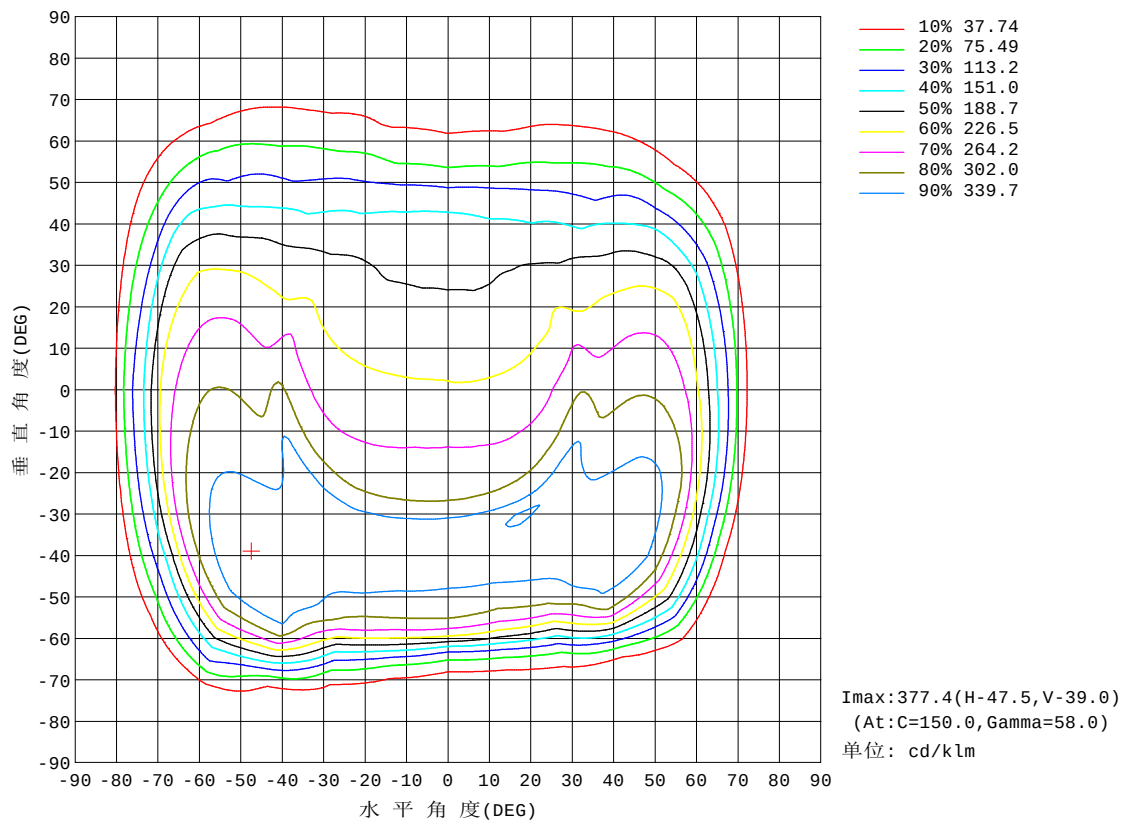

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.400
环境湿度:65.0%
测试距离:6.160米 [K=1.0000]
备注:

平面照度曲线

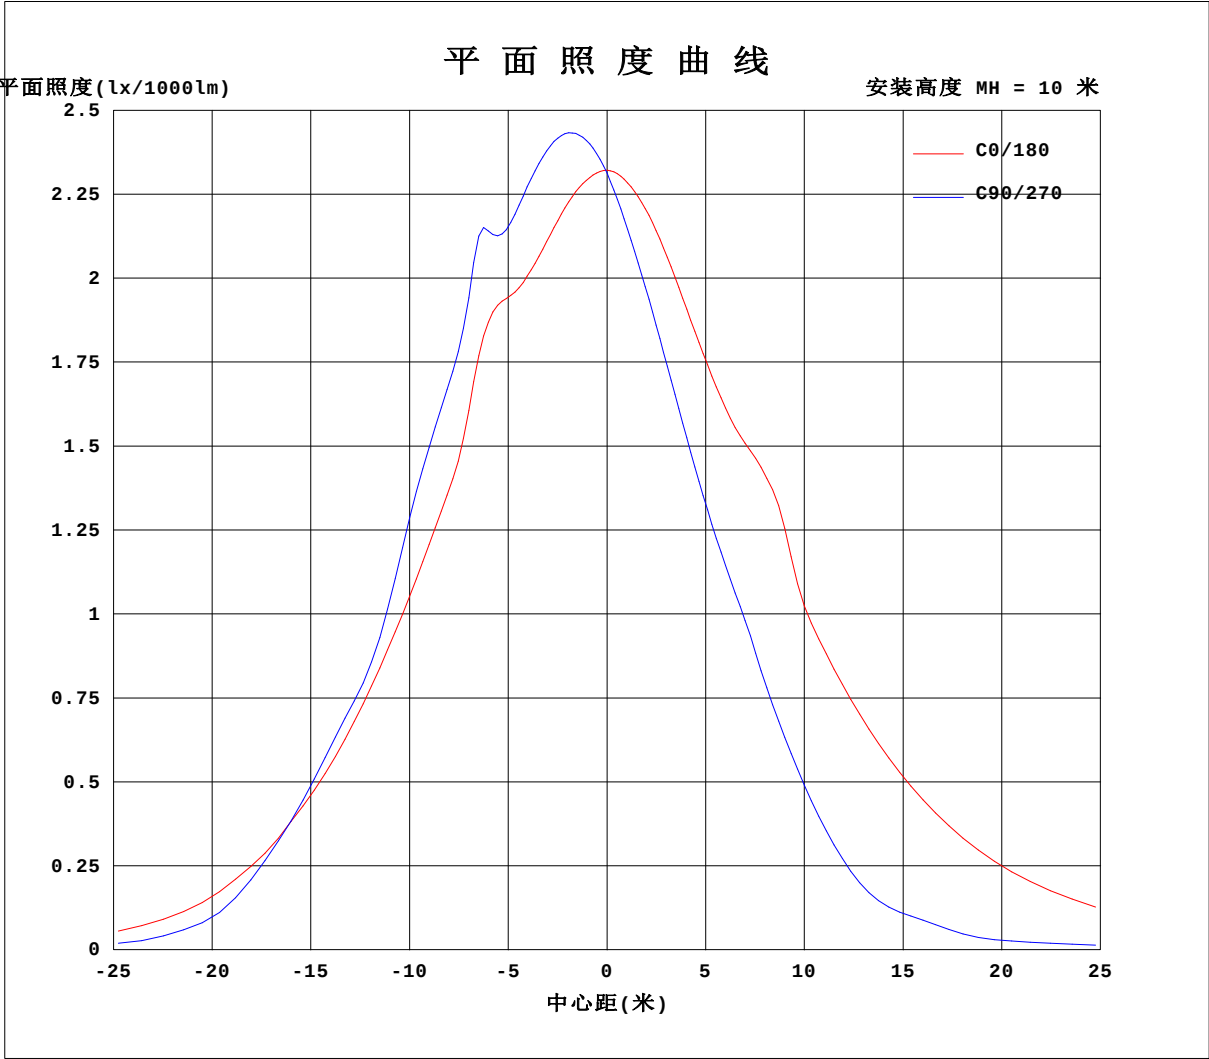


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

LCS图

实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm		
灯具名称: Sunmao	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

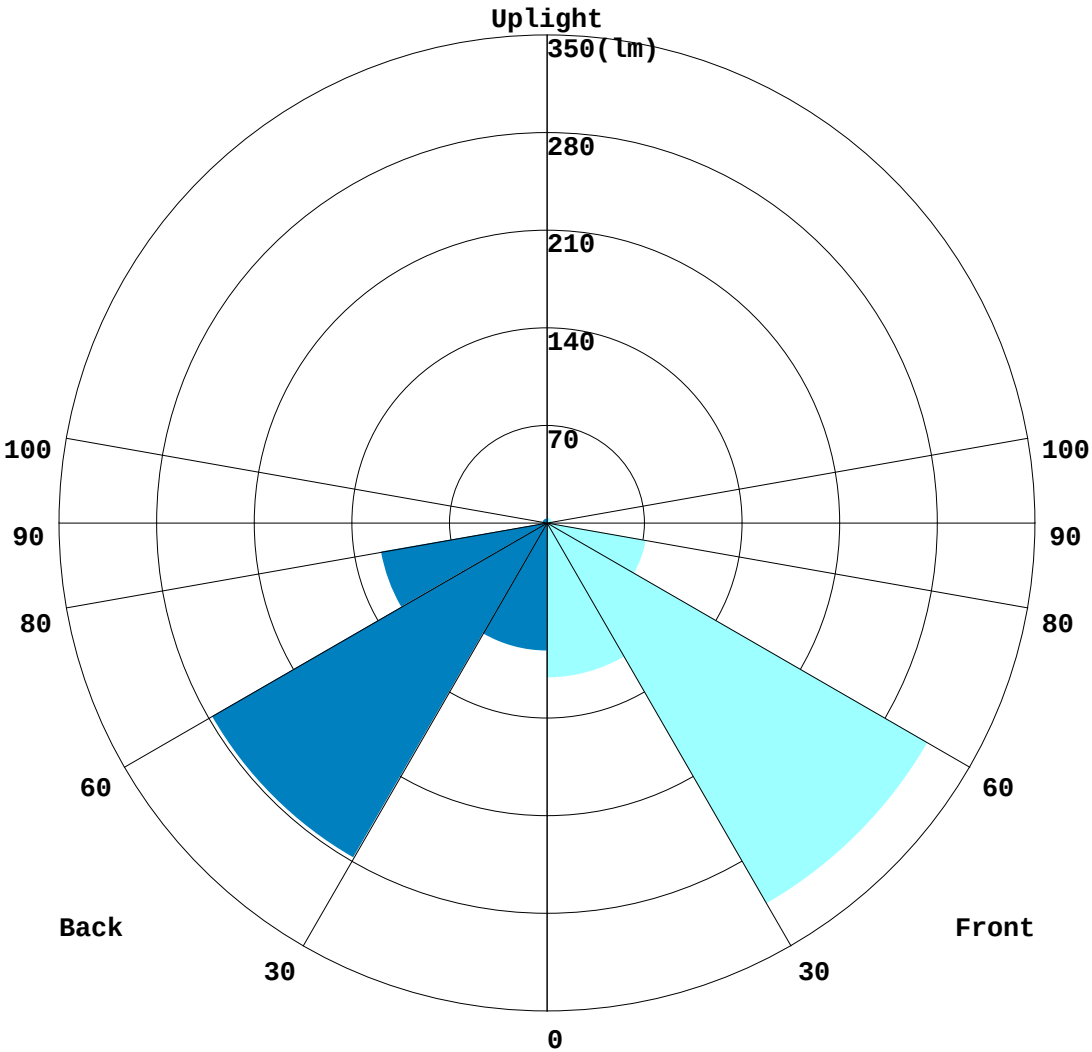

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

BUG分类表

实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm		
灯具名称: Sunmao	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	111.13	11.1
FM - Front-Medium(30-60)	315.32	31.5
FH - Front-High(60-80)	72.216	7.2
FVH - Front-Very High(80-90)	0.71962	0.1
Total Forward Light	503.58	50.4

BL - Back-Low(0-30)	91.765	9.2
BM - Back-Medium(30-60)	277.53	27.8
BH - Back-High(60-80)	120.65	12.1
BVH - Back-Very High(80-90)	3.1592	0.3
Total Back Light	496.42	49.6

UL - Uplight-Low(90-100)	0.6287	0.1
UH - Uplight-High(100-180)	6.8754	0.7
Total Up Light	7.5041	0.8

BUG(Back,Up,Glare) Rating	B1-U1-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	493.11	3.3121	496.42
Street Side	499.39	4.1921	503.58


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

路面等光强曲线

实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm		
灯具名称: Sunmao	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

水平路面等光强曲线

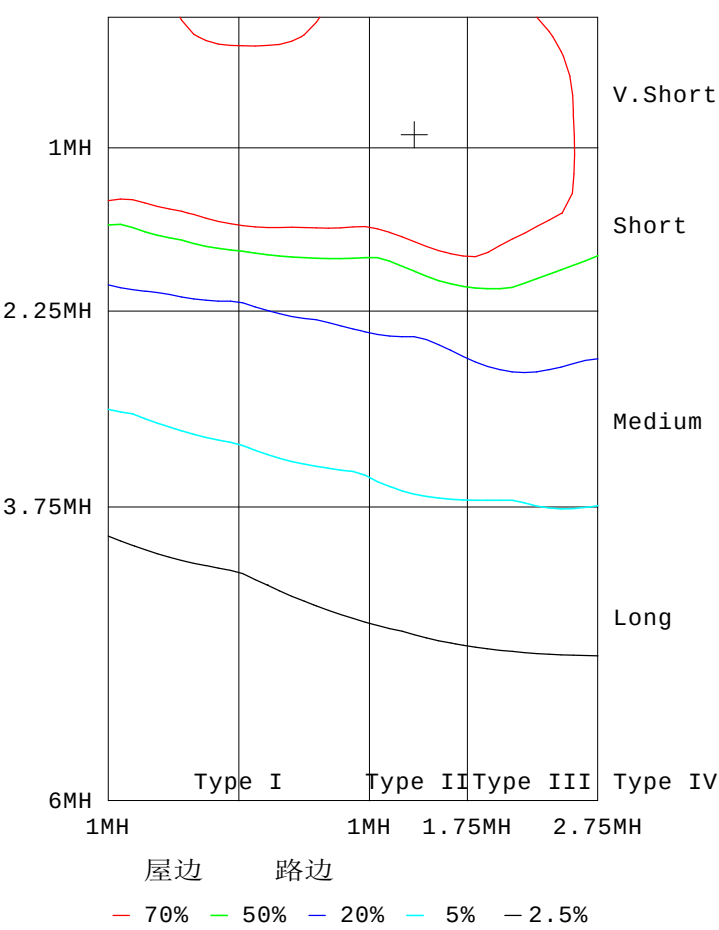

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

远方GO系列分布光度计测试报告

光 强 分 布 数 据 表 格

实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm																	
灯具名称: Sunmao									灯具类型:						灯具重量:		
灯具规格:									外型尺寸:						测试编号:		
制造厂商:									发光口面:						遮光角:		

表 --1																	单位: cd/klm				
C(DEG) g (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270		
0	232	232	232	232	232	231	231	231	231	230	230	230	232	232	232	232	232	231	231		
5	233	235	238	240	242	242	243	242	241	238	236	232	232	229	226	224	222	221	220		
10	235	240	245	248	252	254	255	253	251	247	242	236	233	227	222	217	214	211	211		
15	239	246	253	258	263	266	267	265	262	256	249	241	235	226	218	211	206	203	202		
20	246	256	264	270	275	278	280	277	274	266	257	246	238	226	215	206	200	196	194		
25	263	274	283	288	292	295	294	291	286	277	267	254	243	229	214	201	194	189	188		
30	293	313	319	321	328	331	328	317	304	293	282	267	253	235	214	197	188	184	183		
35	292	328	353	341	336	346	353	364	350	325	310	293	275	248	219	198	186	180	179		
40	291	317	342	360	356	357	359	357	343	342	361	341	305	269	223	193	179	167	163		
45	298	332	357	357	360	360	364	367	363	366	352	317	290	252	210	183	157	146	139		
50	296	342	369	366	338	318	323	335	361	361	360	329	298	257	204	161	138	116	103		
55	279	336	367	359	307	291	304	309	322	370	374	341	303	256	193	139	112	78.1	67.8		
60	231	290	334	333	218	201	213	242	289	362	376	341	296	246	165	111	81.6	58.9	49.1		
65	152	190	245	216	105	82.7	80.1	120	183	340	352	318	270	221	135	85.1	57.6	33.3	30.9		
70	70.1	82.0	128	62.2	35.3	27.3	27.4	40.2	83.0	228	287	243	217	174	94.5	57.6	35.3	26.1	27.8		
75	12.0	12.9	26.6	12.5	11.4	12.0	13.7	17.6	28.2	72.8	157	125	126	89.8	50.1	33.5	20.9	22.7	32.5		
80	2.51	2.54	2.93	2.29	1.96	2.59	3.69	5.92	9.29	14.4	40.9	30.6	41.4	29.7	16.7	13.7	11.5	15.2	12.3		
85	0.45	0.37	0.30	0.26	0.26	0.30	0.39	0.68	1.19	3.06	5.87	6.44	8.21	6.97	6.15	4.75	3.70	2.62	1.80		
90	0.55	0.43	0.32	0.25	0.22	0.23	0.26	0.27	0.27	0.29	0.31	0.64	1.29	1.25	1.12	0.97	0.74	0.46	0.43		
95	0.72	0.54	0.39	0.28	0.23	0.22	0.24	0.24	0.25	0.26	0.30	0.35	0.57	0.72	0.77	0.77	0.69	0.62	0.61		
100	0.90	0.67	0.49	0.34	0.27	0.23	0.23	0.24	0.26	0.29	0.37	0.45	0.73	0.91	0.99	1.00	0.94	0.87	0.86		
105	1.07	0.81	0.60	0.43	0.33	0.27	0.26	0.27	0.30	0.35	0.46	0.59	0.91	1.13	1.23	1.26	1.21	1.16	1.15		
110	1.21	0.93	0.72	0.53	0.41	0.34	0.32	0.32	0.36	0.44	0.57	0.72	1.10	1.33	1.43	1.47	1.46	1.44	1.43		
115	1.33	1.05	0.83	0.63	0.50	0.43	0.40	0.40	0.44	0.54	0.68	0.86	1.25	1.49	1.59	1.62	1.66	1.68	1.67		
120	1.44	1.17	0.93	0.74	0.60	0.53	0.49	0.50	0.54	0.64	0.79	0.97	1.38	1.61	1.71	1.76	1.82	1.88	1.87		
125	1.53	1.27	1.04	0.84	0.71	0.63	0.59	0.59	0.64	0.74	0.89	1.07	1.48	1.71	1.81	1.88	1.99	2.05	2.04		
130	1.58	1.35	1.13	0.95	0.81	0.72	0.69	0.69	0.74	0.84	0.98	1.15	1.56	1.78	1.89	1.95	2.08	2.16	2.18		
135	1.61	1.41	1.22	1.04	0.91	0.82	0.79	0.79	0.84	0.93	1.04	1.19	1.61	1.81	1.92	1.98	2.09	2.18	2.22		
140	1.64	1.47	1.29	1.13	1.01	0.92	0.89	0.87	0.92	1.00	1.10	1.22	1.65	1.81	1.93	1.99	2.07	2.14	2.19		
145	1.67	1.51	1.36	1.22	1.10	1.01	0.98	0.96	1.00	1.07	1.15	1.27	1.67	1.80	1.91	2.00	2.06	2.11	2.16		
150	1.71	1.58	1.43	1.29	1.18	1.10	1.06	1.05	1.08	1.14	1.23	1.33	1.68	1.79	1.90	1.98	2.03	2.07	2.11		
155	1.73	1.62	1.49	1.36	1.26	1.19	1.15	1.14	1.16	1.22	1.31	1.41	1.70	1.79	1.87	1.94	1.99	2.04	2.07		
160	1.75	1.65	1.54	1.43	1.35	1.28	1.26	1.24	1.27	1.31	1.39	1.48	1.72	1.78	1.84	1.90	1.95	2.00	2.02		
165	1.77	1.69	1.60	1.51	1.44	1.39	1.37	1.36	1.37	1.41	1.48	1.57	1.75	1.78	1.82	1.87	1.91	1.94	1.95		
170	1.78	1.73	1.65	1.59	1.54	1.50	1.48	1.47	1.49	1.52	1.57	1.66	1.77	1.78	1.81	1.83	1.84	1.85	1.86		
175	1.80	1.75	1.70	1.65	1.62	1.59	1.58	1.57	1.58	1.61	1.65	1.71	1.80	1.78	1.78	1.78	1.77	1.76	1.75		
180	1.80	1.76	1.74	1.72	1.70	1.68	1.67	1.66	1.66	1.68	1.71	1.73	1.80	1.76	1.74	1.72	1.70	1.68	1.66		

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

远方GO系列分布光度计测试报告

光 强 分 布 数 据 表 格

实测参数: U:230.08V I:0.5559A P:123.74W PF:0.9675 Freq:59.98Hz 实检光通:18767.5x1 lm		
灯具名称: Sunmao	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

表--2						单位: cd/klm													
C(DEG) g (DEG)	285	300	315	330	345														
0	231	231	230	230	230														
5	220	221	223	225	227														
10	211	213	216	221	227														
15	203	206	211	219	228														
20	195	199	207	218	232														
25	188	193	204	221	242														
30	184	191	206	230	260														
35	179	185	198	226	260														
40	161	172	188	217	256														
45	139	148	173	211	259														
50	110	124	145	200	255														
55	74.0	96.4	115	176	240														
60	54.2	67.3	89.9	140	203														
65	30.6	46.7	61.2	84.8	134														
70	23.5	24.3	33.7	39.6	66.8														
75	18.7	13.7	13.9	12.4	14.6														
80	6.58	5.33	4.58	4.25	3.64														
85	1.23	1.08	0.85	0.70	0.56														
90	0.50	0.64	0.77	0.80	0.74														
95	0.72	0.89	1.02	1.05	0.98														
100	1.00	1.16	1.29	1.31	1.21														
105	1.29	1.43	1.50	1.51	1.41														
110	1.55	1.64	1.66	1.66	1.56														
115	1.77	1.81	1.81	1.79	1.68														
120	1.96	1.98	1.95	1.88	1.76														
125	2.12	2.14	2.06	1.94	1.79														
130	2.23	2.24	2.12	1.94	1.76														
135	2.25	2.26	2.11	1.92	1.71														
140	2.20	2.19	2.07	1.89	1.68														
145	2.15	2.12	2.02	1.86	1.66														
150	2.10	2.06	1.97	1.84	1.68														
155	2.06	2.02	1.94	1.83	1.70														
160	2.02	1.98	1.92	1.83	1.74														
165	1.95	1.93	1.89	1.84	1.77														
170	1.85	1.85	1.83	1.81	1.78														
175	1.74	1.75	1.76	1.76	1.76														
180	1.66	1.66	1.68	1.71	1.73														

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

远方GO系列分布光度计测试报告

Photometric Data Table [cd/klm]

G/C	0.0	15.0	30.0	45.0	60.0	75.0	90.0	105.0	120.0	135.0
0.0	232.2	232.0	232.1	231.6	231.9	231.3	231.3	230.7	230.7	230.1
3.0	232.3	233.8	235.4	236.5	237.8	238.0	238.1	237.3	236.5	234.8
6.0	233.0	236.0	239.2	241.5	243.8	244.6	245.1	244.0	242.5	239.8
9.0	234.3	238.8	243.3	246.6	250.0	251.5	252.4	251.0	249.0	245.1
12.0	236.2	242.1	247.8	252.1	256.3	258.4	259.7	258.1	255.6	250.6
15.0	238.7	246.1	253.0	258.1	263.0	265.7	267.2	265.3	262.1	255.9
18.0	242.6	251.2	259.1	264.8	270.2	273.0	274.5	272.6	268.9	261.6
21.0	248.9	258.7	267.4	273.5	278.0	280.8	282.3	280.1	276.0	267.7
24.0	258.7	269.6	278.5	283.9	288.0	290.5	290.9	288.3	283.2	274.4
27.0	274.3	286.5	295.3	298.7	302.5	304.6	303.2	299.0	292.1	282.2
30.0	292.6	312.9	319.4	321.3	327.6	331.0	328.0	317.5	304.3	292.6
33.0	300.0	332.4	351.8	344.8	344.6	356.3	360.5	351.8	326.9	307.7
36.0	287.7	318.8	349.8	343.8	337.8	344.5	349.7	357.9	352.3	335.6
39.0	288.7	314.4	342.5	359.6	352.4	353.7	355.7	353.4	340.8	346.0
42.0	294.3	323.0	347.2	356.9	360.8	361.4	364.6	362.7	351.9	347.3
45.0	297.9	331.9	357.3	357.2	360.1	360.2	364.1	366.8	362.8	365.8
48.0	298.4	339.0	365.6	362.9	352.8	336.1	339.0	354.6	364.5	361.8
51.0	294.4	342.3	370.5	367.9	329.3	311.8	319.1	326.0	355.4	362.8
54.0	283.6	338.9	369.5	364.3	311.2	300.8	312.3	311.5	330.4	368.5
57.0	265.7	326.1	357.3	346.4	282.6	261.1	276.3	291.6	311.3	371.7
60.0	230.5	290.3	334.5	333.5	217.9	201.0	213.4	242.0	288.7	362.1
63.0	185.8	234.9	285.4	276.8	148.1	123.5	119.9	172.9	229.6	348.1
66.0	136.9	167.5	224.1	181.2	85.65	65.26	63.04	100.5	160.1	328.6
69.0	90.28	103.7	153.0	90.04	42.29	32.86	30.43	50.84	101.3	259.0
72.0	39.89	41.31	74.98	28.70	22.39	20.01	21.63	27.84	51.58	164.7
75.0	12.01	12.92	26.61	12.48	11.41	12.00	13.72	17.57	28.23	72.76
78.0	5.071	5.291	6.871	5.489	4.893	5.753	6.937	10.25	14.71	22.88
81.0	1.623	1.565	1.473	1.274	1.221	1.693	2.269	4.170	6.988	11.72
84.0	0.4437	0.3677	0.3064	0.2781	0.2789	0.3860	0.6067	1.139	1.969	4.717
87.0	0.4804	0.3828	0.3000	0.2489	0.2348	0.2612	0.3119	0.3277	0.4256	0.9756
90.0	0.5531	0.4270	0.3206	0.2484	0.2221	0.2312	0.2634	0.2729	0.2720	0.2886
93.0	0.6465	0.4887	0.3597	0.2635	0.2232	0.2201	0.2430	0.2473	0.2491	0.2638
96.0	0.7517	0.5632	0.4100	0.2904	0.2360	0.2207	0.2345	0.2378	0.2454	0.2672
99.0	0.8621	0.6456	0.4705	0.3284	0.2587	0.2286	0.2335	0.2390	0.2515	0.2848
102.0	0.9680	0.7291	0.5366	0.3749	0.2896	0.2452	0.2409	0.2487	0.2682	0.3138
105.0	1.065	0.8109	0.6045	0.4294	0.3286	0.2718	0.2593	0.2676	0.2950	0.3529
108.0	1.155	0.8873	0.6710	0.4868	0.3744	0.3084	0.2900	0.2972	0.3306	0.4019
111.0	1.235	0.9589	0.7382	0.5477	0.4264	0.3540	0.3317	0.3355	0.3741	0.4571
114.0	1.310	1.030	0.8040	0.6100	0.4817	0.4076	0.3813	0.3827	0.4241	0.5147
117.0	1.379	1.100	0.8691	0.6742	0.5417	0.4659	0.4348	0.4371	0.4787	0.5761
120.0	1.439	1.166	0.9340	0.7380	0.6034	0.5259	0.4944	0.4953	0.5383	0.6388
123.0	1.493	1.228	0.9956	0.7989	0.6649	0.5851	0.5539	0.5543	0.5996	0.7010
126.0	1.539	1.285	1.056	0.8617	0.7267	0.6442	0.6140	0.6146	0.6622	0.7631
129.0	1.572	1.333	1.111	0.9242	0.7896	0.7043	0.6737	0.6745	0.7223	0.8218
132.0	1.592	1.371	1.167	0.9856	0.8528	0.7646	0.7321	0.7316	0.7804	0.8765
135.0	1.611	1.409	1.220	1.042	0.9142	0.8249	0.7913	0.7862	0.8381	0.9272
138.0	1.632	1.445	1.267	1.098	0.9721	0.8830	0.8483	0.8398	0.8911	0.9708
141.0	1.651	1.476	1.306	1.152	1.027	0.9400	0.9044	0.8917	0.9389	1.012
144.0	1.664	1.504	1.349	1.204	1.080	0.9964	0.9588	0.9438	0.9855	1.056
147.0	1.686	1.540	1.394	1.249	1.132	1.049	1.012	0.9953	1.032	1.100
150.0	1.709	1.576	1.431	1.291	1.179	1.100	1.064	1.046	1.077	1.140
153.0	1.725	1.602	1.465	1.334	1.226	1.150	1.117	1.099	1.126	1.186
156.0	1.735	1.624	1.500	1.375	1.276	1.205	1.175	1.157	1.184	1.239
159.0	1.745	1.647	1.533	1.419	1.328	1.263	1.237	1.220	1.244	1.294
162.0	1.756	1.671	1.566	1.463	1.383	1.328	1.304	1.289	1.308	1.351
165.0	1.766	1.693	1.599	1.507	1.441	1.393	1.371	1.359	1.374	1.412
168.0	1.775	1.713	1.632	1.555	1.501	1.458	1.438	1.427	1.443	1.476
171.0	1.785	1.732	1.663	1.601	1.554	1.520	1.502	1.494	1.508	1.538
174.0	1.794	1.745	1.688	1.641	1.606	1.577	1.560	1.553	1.564	1.591
177.0	1.798	1.755	1.713	1.681	1.652	1.627	1.613	1.605	1.613	1.633
180.0	1.801	1.763	1.741	1.720	1.697	1.679	1.666	1.660	1.665	1.681
G/C	150.0	165.0	180.0	195.0	210.0	225.0	240.0	255.0	270.0	285.0
0.0	229.9	229.6	232.2	232.0	232.1	231.6	231.9	231.3	231.3	230.7
3.0	233.2	231.2	232.1	230.1	228.5	226.7	225.9	224.7	224.5	224.1
6.0	236.8	233.1	232.2	228.5	225.2	222.2	220.4	218.6	218.1	218.1
9.0	240.9	235.3	232.8	227.3	222.4	218.1	215.3	212.9	212.3	212.5
12.0	244.8	237.9	233.8	226.7	220.0	214.3	210.6	207.8	207.1	207.5
15.0	248.9	240.6	234.9	226.2	218.0	211.0	206.4	203.1	202.1	202.6
18.0	253.4	243.7	236.5	226.1	216.2	207.8	202.3	198.5	197.3	197.7
21.0	258.4	247.4	238.5	226.7	214.8	204.9	198.4	194.3	192.8	193.4
24.0	264.3	252.0	241.7	228.0	213.8	202.0	194.8	190.2	188.8	189.4
27.0	271.8	258.4	246.3	230.4	213.4	199.5	191.3	186.7	185.3	186.2
30.0	281.9	267.4	253.3	234.6	213.9	197.4	188.5	183.7	182.5	184.1

C角度范围: 0度 - 360度

C角度间隔: 15.0度

测试速度: 快速

环境温度: 25.3℃

测试人员:

测试日期: 2018-10-22

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.400

环境湿度: 65.0%

测试距离: 6.160米 [K=1.0000]

备注:

远方GO系列分布光度计测试报告

Photometric Data Table [cd/klm]

33.0	296.4	280.6	263.7	241.5	215.5	197.3	187.1	181.6	180.3	181.4
36.0	318.8	301.3	280.8	250.7	220.9	197.5	184.5	179.3	176.6	176.9
39.0	352.9	331.8	299.2	265.8	225.0	194.3	180.7	170.7	166.4	165.5
42.0	361.0	338.9	305.9	260.9	215.8	189.0	172.4	158.7	154.3	151.4
45.0	352.0	316.9	290.0	252.4	210.2	183.0	157.1	145.7	139.1	138.9
48.0	352.6	323.3	294.4	255.3	207.5	171.6	146.4	128.3	118.3	122.2
51.0	363.3	331.7	299.7	257.7	202.5	156.0	132.4	108.3	94.43	102.7
54.0	371.8	339.0	302.8	257.5	195.8	144.4	117.8	84.87	72.44	80.21
57.0	376.9	342.7	302.3	253.4	183.8	126.4	100.3	67.61	62.75	64.83
60.0	376.4	340.7	296.0	246.2	165.5	111.0	81.59	58.90	49.12	54.17
63.0	366.3	330.5	282.8	233.5	149.8	96.09	65.75	42.49	33.29	38.29
66.0	342.3	309.2	262.8	213.6	126.0	79.36	53.67	31.45	30.19	28.87
69.0	303.7	267.7	233.3	185.9	102.1	62.65	40.21	27.55	27.90	25.02
72.0	238.9	192.9	182.2	139.7	78.85	47.73	27.22	23.60	31.64	20.03
75.0	157.0	124.9	126.3	89.82	50.09	33.54	20.91	22.66	32.52	18.66
78.0	94.47	67.18	80.24	48.68	27.14	20.80	15.27	17.49	20.19	13.67
81.0	28.55	20.55	28.28	20.29	13.51	11.46	9.792	10.77	9.414	5.101
84.0	8.344	9.140	10.45	8.702	7.889	6.045	4.968	3.901	2.782	1.762
87.0	2.776	3.481	4.402	4.181	3.545	2.687	1.862	1.231	0.9125	0.6651
90.0	0.3130	0.6400	1.294	1.253	1.122	0.9736	0.7424	0.4557	0.4272	0.4999
93.0	0.2884	0.3245	0.5314	0.6602	0.7041	0.6933	0.6079	0.5288	0.5264	0.6230
96.0	0.3093	0.3669	0.5988	0.7518	0.8117	0.8105	0.7376	0.6627	0.6590	0.7731
99.0	0.3497	0.4281	0.6916	0.8677	0.9430	0.9524	0.8848	0.8157	0.8090	0.9382
102.0	0.4007	0.5026	0.7995	0.9978	1.086	1.105	1.047	0.9861	0.9769	1.114
105.0	0.4615	0.5851	0.9140	1.132	1.230	1.256	1.212	1.159	1.149	1.286
108.0	0.5278	0.6697	1.027	1.257	1.361	1.390	1.367	1.330	1.324	1.451
111.0	0.5961	0.7521	1.130	1.367	1.468	1.502	1.503	1.492	1.483	1.600
114.0	0.6622	0.8308	1.223	1.460	1.559	1.593	1.620	1.633	1.626	1.731
117.0	0.7265	0.9029	1.306	1.541	1.637	1.677	1.724	1.762	1.756	1.850
120.0	0.7906	0.9691	1.376	1.610	1.710	1.760	1.822	1.879	1.872	1.961
123.0	0.8534	1.033	1.440	1.672	1.775	1.837	1.922	1.984	1.977	2.058
126.0	0.9135	1.089	1.497	1.727	1.829	1.899	2.014	2.076	2.074	2.146
129.0	0.9666	1.135	1.544	1.767	1.873	1.943	2.068	2.145	2.156	2.215
132.0	1.008	1.169	1.584	1.796	1.904	1.973	2.092	2.178	2.206	2.251
135.0	1.044	1.189	1.614	1.807	1.922	1.984	2.092	2.175	2.220	2.250
138.0	1.077	1.205	1.633	1.807	1.935	1.986	2.083	2.156	2.205	2.224
141.0	1.109	1.228	1.651	1.806	1.930	1.991	2.070	2.132	2.182	2.189
144.0	1.140	1.256	1.664	1.802	1.917	1.997	2.064	2.113	2.163	2.162
147.0	1.182	1.292	1.676	1.796	1.904	1.994	2.053	2.097	2.143	2.134
150.0	1.228	1.332	1.681	1.792	1.896	1.977	2.033	2.074	2.114	2.102
153.0	1.277	1.379	1.691	1.791	1.886	1.955	2.010	2.051	2.086	2.075
156.0	1.325	1.425	1.710	1.789	1.865	1.929	1.987	2.029	2.062	2.053
159.0	1.371	1.465	1.721	1.782	1.844	1.903	1.962	2.005	2.035	2.027
162.0	1.421	1.510	1.731	1.779	1.831	1.884	1.937	1.977	2.002	1.994
165.0	1.477	1.567	1.746	1.779	1.823	1.867	1.907	1.936	1.954	1.950
168.0	1.536	1.623	1.760	1.779	1.814	1.845	1.871	1.886	1.895	1.892
171.0	1.591	1.669	1.777	1.780	1.805	1.820	1.830	1.834	1.836	1.829
174.0	1.635	1.701	1.794	1.780	1.790	1.788	1.785	1.778	1.772	1.765
177.0	1.670	1.716	1.802	1.772	1.767	1.753	1.738	1.725	1.715	1.709
180.0	1.706	1.726	1.803	1.762	1.742	1.720	1.697	1.679	1.665	1.660
G/C	300.0	315.0	330.0	345.0						
0.0	230.7	230.1	229.9	229.6						
3.0	224.9	225.5	226.8	228.1						
6.0	219.6	221.4	224.2	227.2						
9.0	214.6	217.7	221.9	226.8						
12.0	210.2	214.2	220.1	226.9						
15.0	205.9	211.2	218.7	227.7						
18.0	201.6	208.5	218.1	229.6						
21.0	197.7	206.1	218.5	233.2						
24.0	194.3	204.3	220.3	239.2						
27.0	191.6	203.1	222.5	247.6						
30.0	190.8	206.1	230.3	260.0						
33.0	188.0	204.4	234.0	269.3						
36.0	183.5	195.8	222.0	256.2						
39.0	176.5	190.4	218.0	254.9						
42.0	161.6	184.1	216.5	257.6						
45.0	148.3	172.6	211.3	259.5						
48.0	134.9	154.1	205.1	257.7						
51.0	118.6	140.6	197.0	253.2						
54.0	102.6	121.3	182.6	244.4						
57.0	84.06	104.8	161.6	228.8						
60.0	67.35	89.88	140.2	203.4						
63.0	54.58	73.10	106.1	162.7						
66.0	42.39	54.87	75.16	120.8						

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

远方GO系列分布光度计测试报告

Photometric Data Table [cd/klm]



69.0	27.74	38.94	47.87	81.42
72.0	19.49	23.12	24.82	41.97
75.0	13.71	13.90	12.39	14.60
78.0	8.469	7.473	7.035	6.424
81.0	4.137	3.546	3.158	2.476
84.0	1.477	1.161	0.9609	0.6474
87.0	0.6371	0.6510	0.6744	0.6221
90.0	0.6388	0.7702	0.8029	0.7447
93.0	0.7818	0.9206	0.9510	0.8817
96.0	0.9399	1.078	1.107	1.026
99.0	1.107	1.238	1.261	1.170
102.0	1.274	1.385	1.396	1.297
105.0	1.427	1.504	1.508	1.406
108.0	1.560	1.604	1.603	1.502
111.0	1.677	1.695	1.686	1.583
114.0	1.781	1.781	1.764	1.655
117.0	1.877	1.865	1.830	1.719
120.0	1.976	1.949	1.884	1.763
123.0	2.075	2.021	1.926	1.787
126.0	2.162	2.077	1.947	1.788
129.0	2.226	2.114	1.945	1.768
132.0	2.260	2.123	1.932	1.736
135.0	2.256	2.110	1.916	1.707
138.0	2.223	2.086	1.900	1.689
141.0	2.179	2.064	1.882	1.681
144.0	2.134	2.032	1.861	1.666
147.0	2.092	1.997	1.848	1.665
150.0	2.058	1.968	1.837	1.675
153.0	2.035	1.950	1.829	1.687
156.0	2.013	1.937	1.829	1.703
159.0	1.990	1.926	1.833	1.727
162.0	1.965	1.914	1.839	1.749
165.0	1.931	1.894	1.840	1.765
168.0	1.887	1.860	1.825	1.775
171.0	1.828	1.820	1.799	1.781
174.0	1.767	1.774	1.771	1.768
177.0	1.711	1.724	1.738	1.739
180.0	1.664	1.682	1.709	1.726

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2018-10-22


γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.400
环境湿度: 65.0%
测试距离: 6.160米 [K=1.0000]
备注:

光 通 量 数 据:

灯 具 效 率:	100.0 %
路 边 向 下:	499.4 lm/1000 lm
路 边 向 上:	4.192 lm/1000 lm
屋 边 向 下:	493.1 lm/1000 lm
屋 边 向 上:	3.312 lm/1000 lm

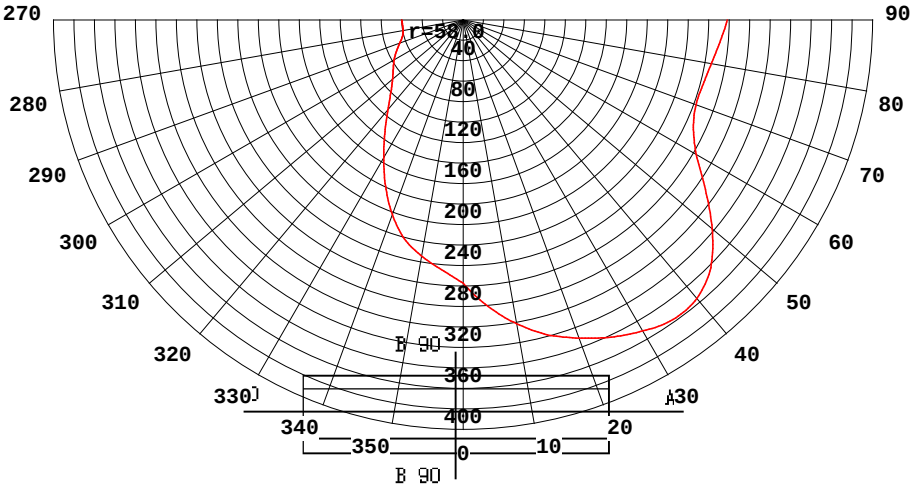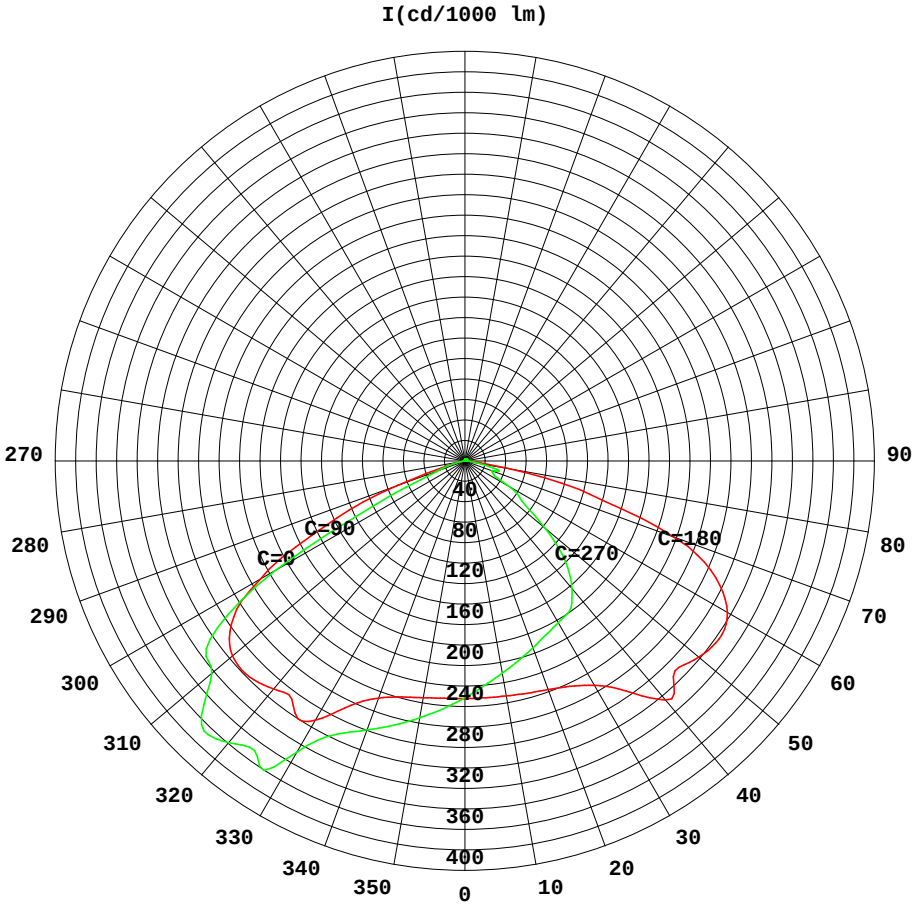

$$I_{\max}(100\%) = 377.6 \text{ cd/1000 lm}$$

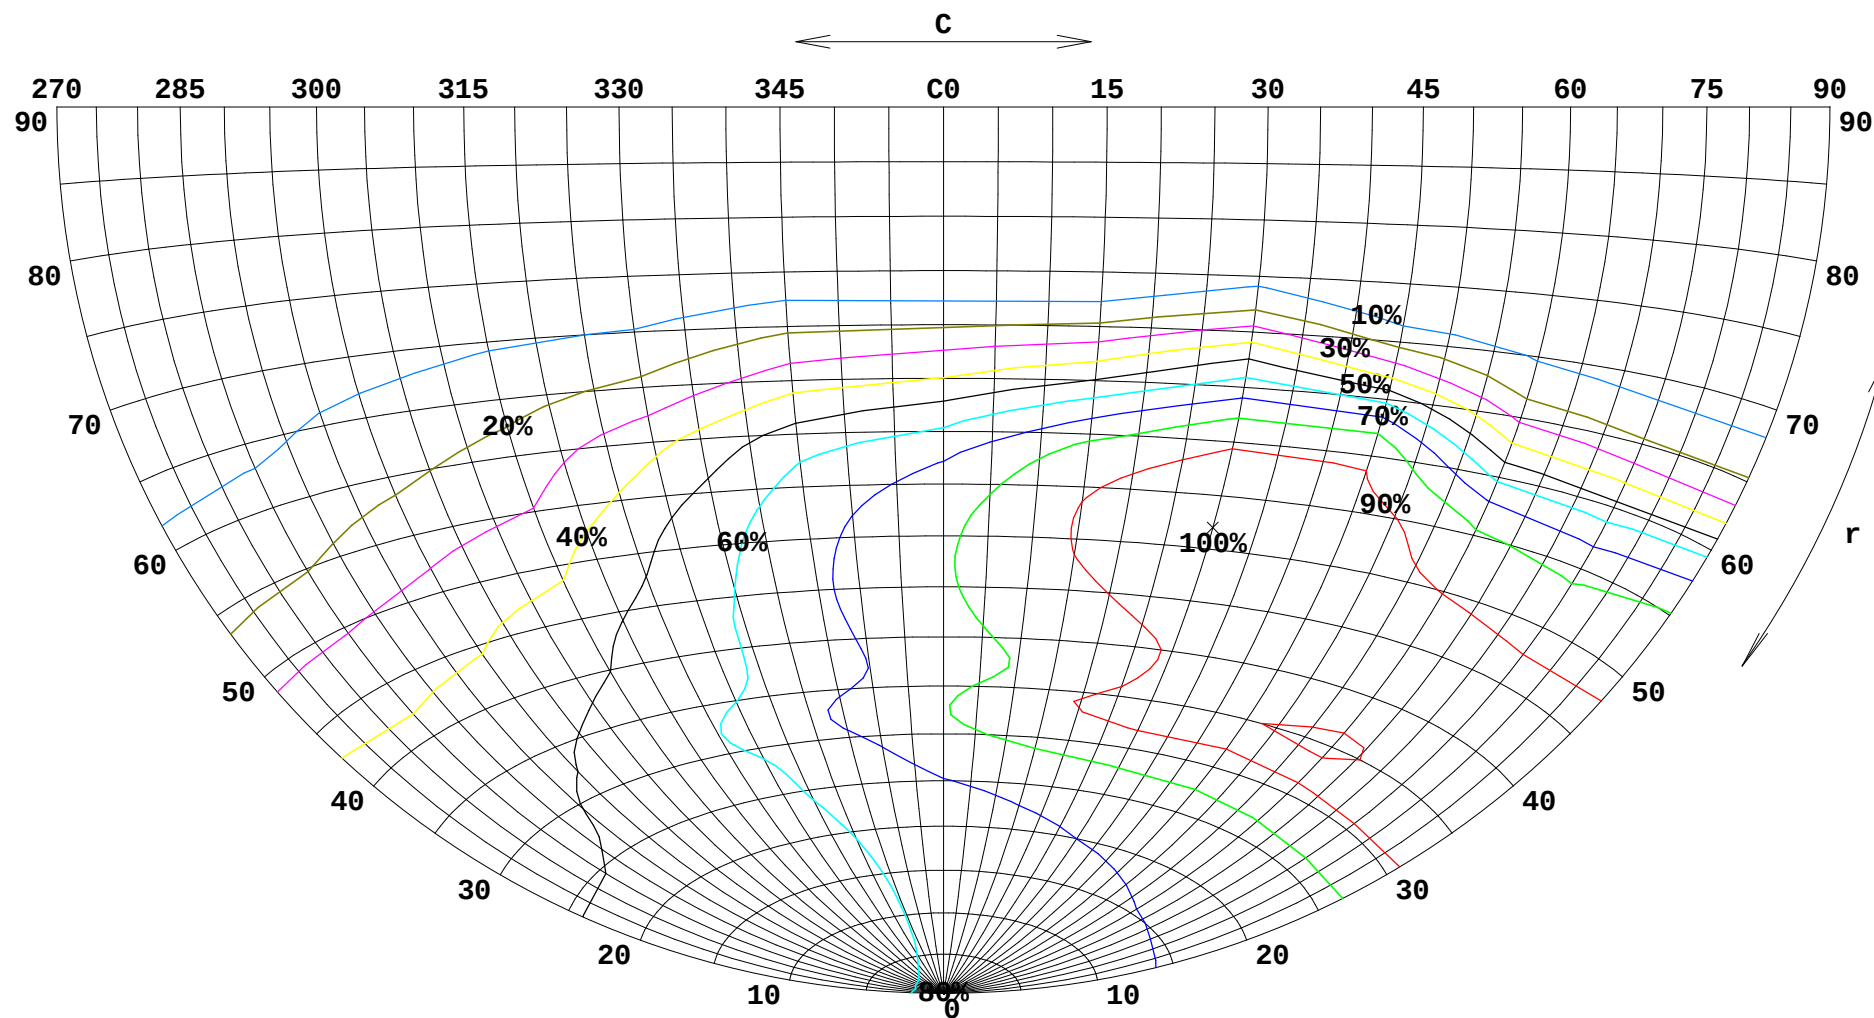

X/MH $E_{\max}(100\%) = 2.322 \text{ lx}/1000 \text{ lm}$ $H = 10\text{m}$

